

AN IMPROVED AODV ROUTING PROTOCOL BASED ON LOCAL ROUTE REPAIR MECHANISM

Arpit Dhingra¹, Anil Kumar²

¹Department of Computer Science and Engineering,
Guru Nanak Dev University, Amritsar, India,
arpitdhingra89@gmail.com

²Department of Computer Science and Engineering,
Guru Nanak Dev University, Amritsar, India,
anil.gndu@gmail.com

Abstract: *With the dynamic nature of Ad-hoc Networks coupled with the mobility of nodes results in breakage of the links due to ever changing topology of the nodes. When there is a substantial increase in the degree of mobility of the wireless network more link errors are likely to occur. When this happens, route repair is typically performed to establish a new route. Such route repair mechanisms suffers from the problems like high control overhead and long packet delay making them inefficient due to frequent failures of intermediate connections in an end-to-end communication. When there is a breakage in the intermediate link, it is favorable to discover a new route locally without resorting to an end-to-end route discovery. In this paper we propose ASRODV, an algorithm based on local route repair (LRR) mechanism such that the repair is confined to the vicinity of the broken link. The algorithm overcomes the limitations of standard AODV by decreasing the reaction time of recovery and the overhead of route maintenance. In the earlier AODV routing protocol, on the occurrence of a link break an error message is sent to the source stating that a link failure has taken place and further communication is stopped temporarily. Where as in ASRODV, nodes in the active path between source and destination act as a virtual source when link breakage occurs and there by the search process is continued till the link is formed to reach the original destination is reached. A comparison has been carried out between original routing protocol (AODV) and the improved algorithm (ASRODV) on various QOS parameters by simulating them in network simulator ns-2. The results demonstrate that the network performance can be significantly improved using the proposed local repair scheme.*

Keywords: Mobile Ad-Hoc Network, AODV, Local Route Repair.

I. INTRODUCTION

Ad Hoc on-demand distance vector routing (AODV) is a reactive routing protocol of mobile Ad Hoc networks. When a new route is needed, the source node broadcasts a Route Request (RREQ) message. Any node without a route to the destination rebroadcasts the RREQ. Otherwise, if the node has a route to the requested destination, it sends a Route Reply (RREP) message to the source node. When the source node receives a RREP, the route is established and the source can start using it. If data is flowing and a link break is detected by the intermediate node, a Route Error (RERR) message is sent to the source of the data in a hop-by-hop manner. As the RERR propagates towards the source of the network, each transitional node invalidates routes to the destinations that have now become unreachable. When the source of the data receives the RERR it disprove the route and reinitiates route discovery if necessary [2].

In this paper, a local repair scheme based on link breaks for MANET is proposed. When a link break occurs, the node that is upstream of the lost link (i.e. the repairing node) classifies the link breaks and adopts different methods for different link breaks depending on the status of its downstream node.

II. RESEARCH EFFORTS ON LOCAL REPAIR

Various novel algorithms have been proposed by researchers to improve AODV when links break. Srinath, P., Abhilash, P., & Sridhar, I. presented a strategy called Router Handoff. In this approach if at a certain point a node that detects one of its links weakening, it preemptively hands off routing information to a node that is suitably situated. This resulted in routing around the weak links and prevented the route from being broken [7]. Crisostomo, S., Sargento, S., Brandao, P., & Prior, R.. have proposed a Preemptively Local Route Repair scheme aiming to avoid route failures by preemptively local repairing routes when a link break is about to occur. Their Proposal was to enhance node information referring to link stability to its neighbors resorting to HELLO messages which were appended with a mobility extension containing the position of the node, a motion vector and a timestamp associated with it [3]. Based on the concept of localizing the route request query, Pan, M., Chuang, S. Y., & Wang, S. D. have proposed an approach to repair error links quickly. The authors have tried to improve the current implementation of local repair in AODV in order make the implementation cost effective. The metric used to evaluate the mechanism is based on no. of successfully

transmitted packets in a period [5]. Bai-Long, X. I. A. O., Wei, G., Jun, L., & Si-Lu, Z. have proposed a new mechanism for route repair by modifying the information contained in the packets (RREQ and RREP) of AODV-LLR so as the repair is only confined to the vicinity of the broken links. In this mechanism if the intermediate node detects that the link to the next hop is broken, it then consults its routing table. If it finds a valid entry for next-to-next hop node, the intermediate node increments the SC (Sequence Counter) for the destination and broadcasts a Repair_RREQ message with a TTL=k for the next-to-next hop node. If the Repair_RREQ message reaches the next-to-next hop node through some other intermediate node, it generates a Repair_RREP and unicast the message to the Repair initiator [1].

AODV as described by Perkins, C., Belding-Royer, E., & Das, S. [6] tends to repair the broken route if the node is near to the destination node. Otherwise, if the break node is very distant from destination node, a RREQ message is propagated back to source node and the source node rebroadcast RREQ to find a new route. Unlike AODV, the approach proposed in this paper can repair break route without considering the distance between the broken node and the destination node.

III. PROPOSED ROUTE REPAIR MECHANISM

As intermediate nodes are usually nearer to the destination than the source node, the intermediate nodes on the route are comparatively more suitable in comparison to the source node to broadcast the RREQ message in order to repair or find an alternate route to the destination. Based on this idea we adopted the intermediate nodes that were en-route to repair the broken route to the destination. The standard version AODV protocol uses three types of packets for communication viz. RREQ(Route Request), RREP(Route Reply) and RERR(Route Reply). In addition to these three communication packets we have introduced three more packets viz. R_R(Route Repairing), RR_OK(Route Repair OK), RR_F(Route Repair failure).

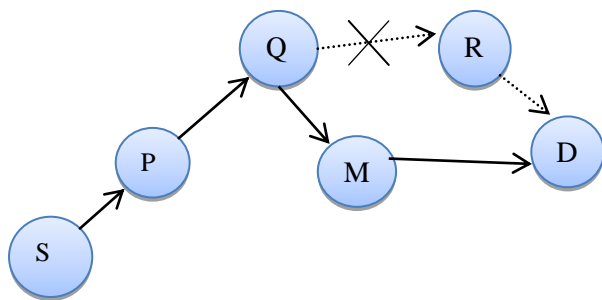


Figure 1: Diagram depicting invalidation of route

If data is flowing from S to D via nodes P, Q, R and a link break is detected by the intermediate node Q, Q does not send a RERR to the source of the data S. Instead, it sends a Route Repairing (R_R) message back to the pre-hop node P. After sending R_R to P, Q tends to broadcast RREQ to repair the break route. If Q cannot repair the route in certain amount of time, it sends back a Route Repair Fail (RR_F) message to P. And at same time Q sends the data packages, which store in the cache, back to P. Otherwise, once Q repairs the route in time, it sends back a Route Repair OK (RR_OK) message to P which has received a R_R message.

Once node P receives a R_R message, it caches the data packages sent to the destination. If P, which is not the source node of the data has received a RR_F message from the break node, P sends a R_R message back to the pre-hop of itself and continues the same procedure. On the contrary, if node P received a RR_OK message which means the break link is repaired by Q, it sends all waiting data packages stored in the cache.

In the worst situation, each intermediate node cannot repair the break link and cannot find a new route to the destination. Then, the source node will consequently receive a R_R message. In this scenario the proposed scheme will have the same operations as the standard AODV. The source broadcasts a RREQ message to find a new route to the destination.

PSEUDO-CODE

1. If ((Node Q identifies link error) AND (Node is an intermediate node))
 - {
 - Q caches the data packets arriving;
 - Q broadcast RREQ message;
 - Q initiates a timer;
 - Q sends R_R message to its pre-hop node;
 - }
2. Else if ((Node Q has already broadcasted RREQ message) AND (timer is expired) AND (Q is an Intermediate node))
 - {
 - Q sends RR_F back to its pre-hop node;
 - Q sends cached data back to pre-hop node;
 - }
3. Else if ((Node Q has sent R_R message to its pre-hop) AND (Q successfully repairs the link) AND (Q is an intermediate node))
 - {
 - Q forwards cached data packets to the next hop;
 - Q sends RR_OK message to its pre-hop node;
 - }

IV. SIMULATION AND RESULTS

We have incorporated the Route Repair scheme into the AODV implementation in the network simulator, ns-2.34. The default implementation of AODV in the simulator was used in our experiments. We refer to the version of AODV with Route Repair incorporated as ASRODV. Our Simulations adopt a network of 50 nodes within an area of 500 meter square using CMU setdest module [4] and create 50 TCP connections. We conducted simulations for CBR and TCP data flows. The antenna type used is Omnidirectional with maximum packets in queue is 200 and the size of the packet is 500bytes. The mobility model used is Random- Waypoint mobility model. Simulations are run for 2, 4, 6, 8 and 10 seconds.

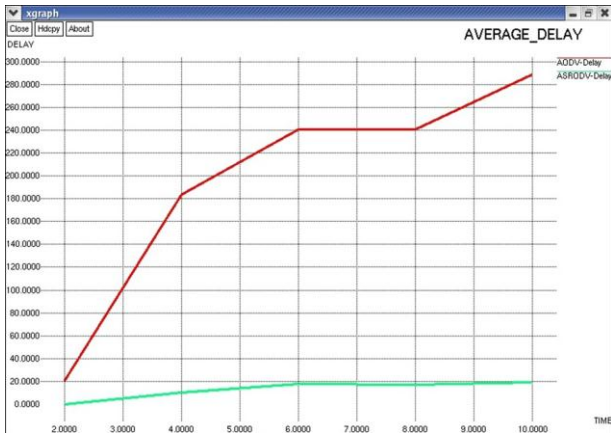


Figure 2: Illustration of the delay vs time

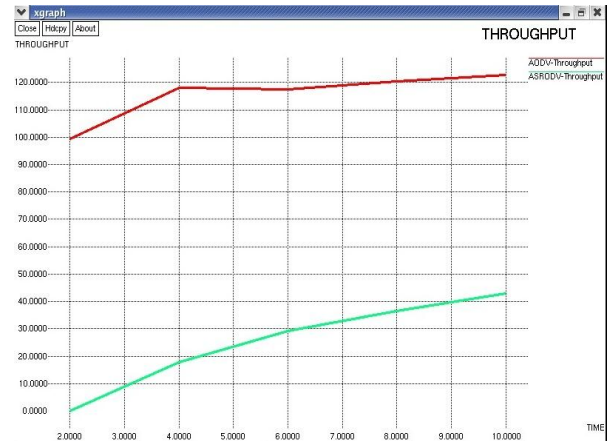


Figure 5: Illustration of the throughput vs time



Figure 3: Illustration of the energy vs time



Figure 4: Illustration of the delivery ratio vs time

V. CONCLUSION

In this paper we have identified and reviewed some of the techniques that have been proposed for local route repair by various researchers to increase the efficiency of the standard route discovery and maintenance procedures employed by AODV protocol. In addition we have proposed a new algorithm called ASRODV which is incorporated in standard AODV for improved performance. We have identified that ASRODV performs better than the AODV on all QoS parameters taken into consideration. This work may help in further improvement in the routing techniques.

REFERENCES

- [1] Bai-Long, X. I. A. O., Wei, G., Jun, L., & Si-Lu, Z. (2006, June). An improvement for local route repair in mobile ad hoc networks. In ITS Telecommunications Proceedings, 2006 6th International Conference on (pp. 691-694). IEEE.
- [2] Chakeres, I. D., & Belding-Royer, E. M. (2004, March). AODV routing protocol implementation design. In Distributed Computing Systems Workshops, 2004. Proceedings. 24th International Conference on (pp. 698-703). IEEE
- [3] Crisostomo, S., Sargento, S., Brandao, P., & Prior, R. (2004, May). Improving AODV with preemptive local route repair. In Wireless ad-hoc networks, 2004 international workshop on (pp. 223-227). IEEE.
- [4] Johnson, D. B., Broch, J., Hu, Y. C., Jetcheva, J., & Maltz, D. A. (1998). The cmu monarch project's wireless and mobility extensions to ns. Proc. of 42nd Internet Engineering Task Force.
- [5] Pan, M., Chuang, S. Y., & Wang, S. D. (2005, December). Local repair mechanisms for on-demand routing in mobile ad hoc networks. In Dependable Computing, 2005. Proceedings. 11th Pacific Rim International Symposium on (pp. 8-pp). IEEE.
- [6] Perkins, C. E., & Royer, E. M. (1999, February). Ad-hoc on-demand distance vector routing. In Mobile Computing Systems and Applications, 1999. Proceedings. WMCSA'99. Second IEEE Workshop on (pp. 90-100). IEEE.
- [7] Srinath, P., Abhilash, P., & Sridhar, I. (2002, December). Router handoff: A preemptive route repair strategy for

AODV. In Personal Wireless Communications, 2002
IEEE International Conference on (pp. 168-171). IEEE.