A New Algorithm for QR Code Watermarking Technique For Digital Images Using Wavelet Transformation *Alikani Vijaya Durga, S Srividya*

¹(PG Scholar) Department of ECE, Chaitanya Institute Of Science and Technology, JNTU (K) Vizy.Ak47@Gmail.Com

²Associate Professor, Department of ECE, Chaitanya Institute Of Science and Technology, JNTU (K) (srividyacist@gmail.com)²

Abstract

In the digital image processing copyright protection and authentication have become more significant, in order to achieve this digital different watermarking techniques are introduced for the security. We propose an algorithm in wavelet domain using wavelet transformation for a digital invisible watermarking is to embedded into a QR code image. In our method we embed a binary image logo considered as watermark embedded into one of selected wavelet subband. The experimental results show that our method has more robustness to attacks in different considerations and it can achieve a viable copyright protection and authentication.

I.INTRODUCTION

Now days Barcode becomes widely known because of their accuracy, and superior functionality characteristics. QR Code is a kind of 2D (two dimensional) Barcode symbol which is categorized in matrix code. It contains information in both the vertical and horizontal directions, whereas a 1D (one dimensional) Barcode symbol contains data in one direction only. QR Code holds considerably a greater volume of information than a 1D Barcode. QR Code developed by Denso Wave [1]. Bar codes are linear one-dimensional codes and can only hold

up to 20 numerical digits, whereas QR codes are two-dimensional (2D) matrix barcodes that can hold 7,089 numeric characters and 4,296 alphanumeric characters, and 1,817 kanji characters of information [4].

In this paper, we describe a novel method to embed the QR code into still digital images. Most of the recent work in watermarking can be grouped into two categories: spatial domain methods, and frequency domain methods. Because frequency domain methods have better robustness than spatial domain, almost a11 techniques embed watermarks in the frequency domain, such as DCT and DWT [2], [3]. To increase robustness against JPEG degradation of the watermarked image, we embed the watermark in low frequency domains of DWT.

II.QR CODE

A.QR code

QR (Quick Response) Codes, are 2dimensional bar codes that encode text strings and were introduced by the Japanese corporation Denso Wave Incorporated [6]. QR codes are considered as the evolution of the one dimensional barcodes. They are able to encode information in both vertical and horizontal direction, thus able to encode several times more information than the one dimensional barcodes. QR codes consist of black and white modules which represent the encoded data.

B.QR Code structure

Here we use as an example version 2, see Figure 1, which is the size that is most widely used, and based on [7], [8], [9], [10] analyze the structure of the QR Code.




Figure 1: Structure of QR Code Version 2 (from [11])

-(1) Finder Pattern: The three identical structures that are located in the upper corners and in the bottom left corner enable the decoder software to recognize. the QR code and determine the correct orientation. These patterns also allow 360 degree (omni-directional) high-speed reading of the code. These structures consist of a 3 X 3 black square surrounded by white modules that are again surrounded by black modules.

(2) Separators: The white separators that surround the Finder Patterns have width of one pixel and make it easier to distinguish the patterns.
(3) Timing pattern: A sequence of black and white modules that help the decoder software to determine the width of a single module.

- (4) Alignment Pattern: This pattern allows the QR reader to correct for distortion when the code is bent or curved. The alignment pattern appears on version 2 and higher and the number of alignment patterns used depends on the version selected fro the encoding.

-(5) Format Information: This section consists of 15 bits and contains the error correction rate and the selected mask pattern of the QR code. The error correction level can be identified from the first two modules of the timing pattern (see figure

LL	LH	LH
HL	HH	
HL		НН

2.2). The format information is read first when the QR code is decoded.


- (6) Data: After the data is converted into Reed-Solomon-encoded data bits, it is stored in 8 bit parts (codeword's) in the data section.

(7) Error Correction: The data codeword's are used in order to generate the error correction (EC) codeword's, which are stored in the error correction section.

- (8) Remainder Bits: This section contains empty bits if the data or the error correction bits cannot be divided into 8 bit code words without a remainder.

III. THE PROPOSED WATERMARKING PROCESS

In this paper we can chose a watermark as binary image of any logo. In the frequency domain we perform the embedding process on QR code image using watermark. As shown in the figure we have to decompose the QR code image by two levels using two-dimensional wavelet transformation. To recover the embedded watermark we do not need the original QR code image subsequently



watermark embedding and watermark extraction.

Fig 2. 2-level 2-dimensional WT

A. Watermark Embedding

The following outlined procedure is for the embedding process (Fig.3)

Step of watermark image with secret key

The watermark image was produced as
 a bit sequence of watermark S. The
 data and background values were set to
 1 and -1, respectively.

$$\mathbf{S} = \{s_{i}, 1 \le i \le N\}, s_i \in \{-1, 1\}$$
(1)

where N is the total number of pixels in the watermark image.

ii. The pseudo-random sequence (P) whose each number can take a value either 1 or −1 was randomly generated with a secret key for embedding and extracting of the watermark.

 $\mathbf{P} = \{ p_{i,1} \le i \le N \}, p_{i} \in \{-1,1\} \quad (2)$

Step of QR code image

- I. The two-level DWT of $M \times M$ image (t_i) was computed for QR code image.
- II. A watermark was then embedded in subband LH2 or HL2 or HH2. According to the rule:

 $t'_i = t_i + \alpha . p_i . s_i, i = 1, 2, ..., N$ (3)

where t_i is input image. t'_i is output image with watermark. α is a magnitude factor which is a constant determining the watermark strength.

- III. After that, the inverse DWT (IDWT) was then applied to obtain the watermarked image.
- IV. Compute PSNR.




Fig. 3. Watermark Embedding Process

B. Watermark Extraction

The watermark extraction algorithm did not use the original QR code image. A prediction of the original value of the pixels is however needed. Thus, a prediction of the original value of the pixels was performed using noise elimination technique. In this paper, we use an averaging 3×3 mask whose elements were fixed to 1/9. The extraction processes are outlined as follows (Fig.4):

I. The predicted image \hat{t}_i could be obtained by smoothing the input image t_i^* with a spatial convolution mask.

The prediction of the original value can be defined as:

$$\widehat{t_{i}} = \frac{1}{c \times c} \sum_{i}^{c \times c} t_{i}^{*}$$
(4)

where c is the size of the convolution mask. The watermarked image and the predicted image were DWT transformed independently.

II. The estimate of the watermark \hat{S}_i is indicated by the difference between t_i^* and \hat{t}_i as:

$$\delta = t_i^* - \hat{t}_i = \alpha . p_i . \hat{s}_i \qquad (5)$$

III. The sign of the difference between the predicted and the actual value is the value of the embedded bit:

$$sgn(\delta_i) = p_i. \ \widehat{s}_i$$
 (6)

The watermark was then estimated by multiplying pseudo- random number to the embedded bit. If an incorrect pseudo random sequence was to be used, the scheme would not work.

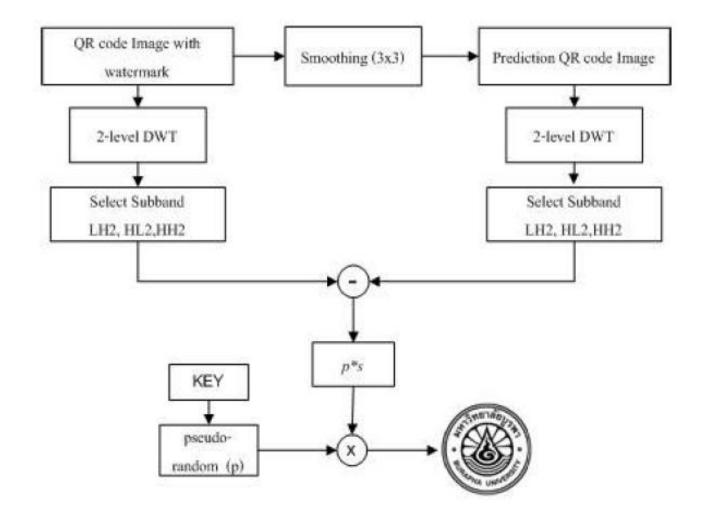


Fig. 4. Watermark Extracting Process


IV.RESULTS

Subb and	PSNR	NC	Extracted watermark
LH	43.0615	0.95 25	MIO
HL	43.1514	0.96 11	NIO
HH	44.2675	0.99 16	VA10

Table	iii
Table	iii

Attack Type	PSNR	NC	Decode QR code
Salt & Pepper Noise (0.02)	40.8837	0.9851	
Salt & Pepper Noise (0.05)	38.4989	0.9687	
Gaussian Noise (0.02)	37.2879	0.9945	\checkmark

Gaussian Noise (0.05)	37.1402	0.9943	
JPEG (40)	39.3897	0.9942	
JPEG (50)	39.3897	0.9942	



	MO	M10	MIO
	Alpha 5	Alpha 10	Alpha 15
	VA10	\mathbf{M}	\mathbf{N}
	Alpha 20	Alpha 25	Alpha 30
	\mathbb{N}	(\MIO	VA10
Ta	Alpha 35 able I PSNR a	Alpha 40 and NC of QR cod	Alpha 45 le Image

Alikani Vijaya Durga, IJECS Volume 3 Issue 8 August, 2014 Page No.7776-7782

α	PSNR	NC	DECODE	QR
			Code	
5	47.1617	0.9826	\checkmark	
10	44.1514	0.9934	\checkmark	
15	42.3905	0.9961	\checkmark	
20	41.1411	0.9967	\checkmark	
25	40.1720	0.9975	\checkmark	
30	39.3802	0.9980	\checkmark	
35	38.7107	0.9986	✓	
40	38.1308	0.9991	\checkmark	
45	37.6193	0.9995	\checkmark	

Attack Type Salt &	Attacked QR code image	Extracted Watermark
Pepper noise (0.02)		MI0
Salt & Pepper noise (0.05)		WI0
Gaussian noise (0.02)		MI0
Gaussian noise (0.05)		VA10
JPEG (40)		M10
JPEG (50)		MI0

CONCLUSION:

In this paper, we are proposing a water marking technique; here a binary or black and white image is embedded into QR code image by using Discrete Wavelet Transform technique. In DWT subband we select any one subband except LL subband i.e., LH, HL, HH to embed the watermark. And also extracting the watermark. These are results shown in simulation results. The objective measures such as PSNR and NC are subject to magnitude factor. And also found more efficient ways to withstand more severe attacks such as stronger noise, high compression, geometric distortion and occlusion etc.

REFERENCES

[1]."Denso wave incorporated," http://www.denso-wave.com/qrcode/indexe. html.

[2] Lumini A and Maio D (2000) A wavelet-based image watermarking scheme In:Proc. Int.conf. Information Technology: Coding and Computing. pp.122-127.

[3] Alattar AM(2004) Reversible watermark using the difference expansion of a generalized integer transform. IEEE Trans. Image Process. 13: 1147-1156.

[4] Jun-Chou Chuang, Yu-Chen Hu & Hsien-Ju
Ko. A Novel Secret Sharing Technique Using QR
Code, International Journal of Image Processing
(IJIP), Volume (4) : Issue (5), pp. 468-475, 2010.
[5]"QR Code,"

http://en.wikipedia.org/wiki/QR_code.

[6] DENSO Wave Incorporated. What is a QR Code?, 2013. http://www.qrcode. com/en/. Accessed 10 Feb 2013.

[7] P. Kieseberg, M. Leithner, M. Mulazzani, L. Munroe, S. Schrittwieser, M. Sinha, E. Weippl. Qr code security. In Proceedings of the 8th International Conference on Advances in Mobile Computing and Multimedia, MoMM '10 (2010), pp. 430–435.

[8] Russ Cox. QArt Codes, 2012.http://research.swtch.com/qart. Accessed 05 Mar 2013.

[9] Thonky.com. QR Code Tutorial, 2012.http://www.thonky.com/qr-code-tutorial/.

Accessed 10 Feb 2013.

[10] Esponse. Innovative QR Code campaigns(AboutQRcodes),2013.http://www.esponce.com/about-qr-codes.

Accessed 23 Mar 2013.

[11] P. Kieseberg, M. Leithner, M. Mulazzani, L. Munroe, S. Schrittwieser, M. Sinha, E. Weippl. Qr code security. In Proceedings of the 8th International Conference on Advances in Mobile Computing and Multimedia, MoMM '10 (2010), pp. 430–435.