

# Perceptual Quality Measure of Screen Content Images

Ms.S.Chinmaya<sup>1</sup>, Mr. R. Balaji<sup>2</sup>

<sup>1</sup>Department of Computer Science and Engineering  
Sri Krishna College of Engineering and Technology  
Coimbatore, India

[15epcs004@skcet.ac.in](mailto:15epcs004@skcet.ac.in)

<sup>2</sup>Department of Computer Science and Engineering  
Sri Krishna College of Engineering and Technology  
Coimbatore, India

[balajir@skcet.ac.in](mailto:balajir@skcet.ac.in)

**Abstract:** *Research on Screen Content Images (SCIs) has become important as they are used frequently in multi-device communication applications. In this project, a study on perceptual quality assessment of distorted SCIs subjectively and objectively is made. A screen image quality assessment database (SIQAD) consisting of 20 source and 980 distorted SCIs is constructed. A subjective quality scores is for estimating which part (text or picture) contributes more to the overall visual quality. The single stimulus methodology with 11 point numerical scale is used as subjective method. Followed by the subjective quality analysis an objective metric is used to measure the visual quality of distorted SCIs. In object quality analysis a weighting strategy method is used to correlate quality of the two regions (text and pictorial) of SCI and provide quality for the entire image.*

**Keywords:** *Screen content image, SIQAD, subjective quality assessment, objective quality assessment.*

## I. INTRODUCTION

SCREEN Content Images (SCIs) [1], includes both texts and pictures together and even graphics. It have been increasingly involved in multi-client communication systems, such as virtual screen sharing [2], information sharing between computer and smart phones [3], cloud computing and gaming, remote education, etc. In these systems, visual content like web pages, emails, slide files and computer screens are typical in the form of SCIs, and then transmitted between different digital devices (computers, tablets or smart phones). For fast sharing in-between different devices, it is important to acquire, compress, store or transmit SCIs efficiently. Many solutions have been proposed to process SCIs, which including segmentation and compression of SCIs [4]. MPEG/VCEG called for proposals to efficiently compress screen content image/videos as an extension of the HEVC standard, and many other proposals have been reported to address this need.

Distortions may involved in SCI when it is processed. Some distortions are blurring, contrast change and compression artifacts. For example, when capturing SCIs by smart phones, due to hand-shake blurring appears on images or out-of-focus of camera. Different settings of brightness or contrast of screens would result in the change of contrast change in captured SCIs. Compression artifacts (e.g., quantization noises and blocking and) commonly appear on encoded SCIs. Peak Signal-to-Noise Ratio (PSNR) is adopted to evaluate the visual quality of processed SCIs. However, it is known that PSNR is

not consistent with human visual perception [5]. Quality of Experience (QoE) is used to evaluate users' viewing experience

on webpages, which is called Web QoE. But, the current Web QoE mainly focuses on Quality of Service (QoS) metrics, e.g., loss ratio, rendering and round-trip time, than taking differences of human perception for pictures and texts into account. Here, the predicted QoS values would be constant if overall loss ratio is determined. However, different loss ratios to textual and pictorial parts lead to quite different QoE. Therefore, perceptual quality measure of SCIs is much effective for various applications. Although many IQA methods have been proposed for quality assessment of natural images [6]. Perceptual quality measure of SCIs, investigate both subjective and objective metrics for the quality evaluation of SCIs.

For the subjective test a large-scale Screen Image Quality Assessment Database (SIQAD) is built. In subjective test, three subjective quality scores are obtained for the entire, textual and pictorial regions of each test image. The discrete 11 scale Single Stimulus (SS) method is adopted for the subjective test. According to the analysis of subjective data, a new scheme is proposed, SCI Perceptual Quality Assessment (SPQA), to objectively evaluate the visual quality of distorted SCIs. The SPQA consists of an objective metric and a weighting strategy. The objective metric is designed to evaluate separately the visual quality of textual and pictorial regions. The weighting strategy is designed to combine the predicted quality scores of pictorial and textual regions to obtain the overall quality scores of tested SCIs. Then compared with 11 state-of-the-art IQA metrics, the proposed SPQA scheme achieves much higher consistency with human visual perception when judging the quality of distorted SCIs.

## II RELATED WORK

Natural Image Quality Assessment (NIQA) has been studied for the last few decades [7]. By adopting subjective testing strategies, several image quality assessment databases [8]–[9] have been constructed, various *Full Reference* (FR) IQA methods [10], [11]–[12], such as SSIM, VIF, FSIM, MAD, GSIM and GMSD, have been proposed to objectively assess the quality of distorted natural images. Besides, *Reduced Reference* (RR) IQA [13] and *No Reference* (NR) IQA metrics [14] are also reported.

Document Image Quality Assessment (DIQA) has got attention in the research community recently due to the increasing requirements of digitization of historical or other typewritten documents. Many document image databases are released, based on various DIQA methods that have been proposed.

The document images in databases mainly consist of gray-scale or binary texts, without pictures. Most of the document images suffer from degradations related to the environment, e.g., stains, paper aging, carbon copy effect and reader annotations. Almost all DIQA methods are designed in no-reference method and implemented at the character (or string) level. The effectiveness of the DIQA methods is evaluated by the Optical Character Recognition (OCR) accuracy is calculated by the OCR software rather than human visual judgment.



(a)



(b)



(c)

Fig 1- (a) natural images, (b) textual images and (c) screen content images.

### III. SIQAD: SCI QUALITY ASSESSMENT DATABASE

To evaluate quality of SCIs, a large-scale screen image database (i.e., SIQAD) with seven distortion types is created, each with seven degradation levels. Totally, 20 reference and 980 distorted SCIs are included in the SIQAD. Subjective evaluation of these SCIs is conducted to obtain the subjective quality scores.

#### A. SUBJECTIVE QUALITY ASSESSMENT OF SCIS

Subjective testing methodologies of image quality evaluation includes Single Stimulus (SS), double-stimulus and paired comparison. In this study, the SS with an 11 point discrete scale is used. Given a image is displayed on the screen, the human subject is asked to give a score (from 0 to 10: 0 is the worst, and 10 is the best) on the image quality based on their visual perception. This methodology is chosen because the viewing experience of subjects is close to that in practice, where there is no access to the reference images. All subjects are required to sit at a distance about 2–2.5 times of the screen height. The subjects are all university under-graduate or graduate students with no experience in image processing and quality assessment. They are all with normal or corrected vision, aging from 19 to 38 years old.

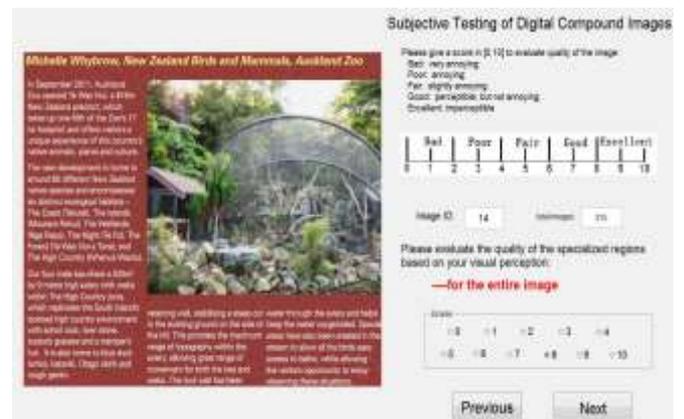


Fig 2- Graphical user interface in the subjective test. The red tooltip will change if subjects need to judge different regions.

where  $m$  and  $n$  represent the dimensions of the images. The weighting maps for textual and pictorial parts of one SCI example are shown in Fig. 5.

**B. OBJECTIVE QUALITY ASSESSMENT OF SCIs**

In objective measure of SCI a scheme (SPQA) is used to objectively evaluate the visual quality of distorted SCIs, considering the visual differences between textual and pictorial regions. The diagram of the proposed scheme is illustrated in Fig. 3. One reference SCI  $X$  and its distorted version  $Y$  are firstly segmented into textual and pictorial layers based on their text segmentation index map  $T$ . The quality of the textual and pictorial layers is then separately evaluated objectively. A novel weighting strategy, derived from the correlation analysis of subjective scores to integrate the two quality scores  $Q_t$  and  $Q_p$  to the final visual quality score  $Q$  of the distorted SCI.

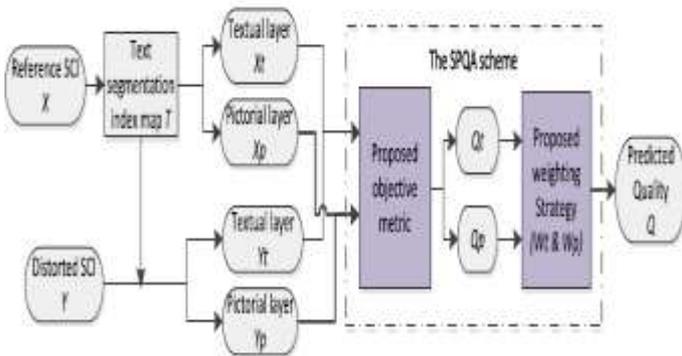


Fig 3- Diagram of the proposed SPQA scheme.

**C. PROPOSED WEIGHTING STRATEGY**


Many factors are there that affects human perception when viewing SCIs, including area ratio and position of texts, size of characters, content of pictures, etc. Initially investigate a statistical property of SCIs that reflects impairments of test images, rather than any specific factor. Image activity measure is adopted to calculate the weights. Image activity values reflect the variation of image content, which can be used to differentiate images [15], [16]. Based on the activity measure and the segmentation process [17], proposed a novel model to compute two weights ( $W_t$  and  $W_p$ ) that can measure the effect of textual and pictorial regions to the quality of the entire image. In particular, given one reference SCI and its text segmentation index map  $T$  in which textual pixels are marked by one and pictorial pixels by zero, and calculates the activity map  $A$  of the corresponding distorted SCI [17]. The activity maps  $A_t = A \times T$  and  $A_p = A \times (1 - T)$  of the textual and pictorial regions can be calculated. Considering the human visual acuity in the HVS., a Gaussian mask  $G$  is used to weight the activity values. Based on the weighted activity map, two values  $W_t$  and  $W_p$  for the textual and pictorial parts are computed as Eq. (1) and (2), which are subsequently employed as weights to combine the two quality scores.

$$W_t = \frac{\sum_{i=1}^m \sum_{j=1}^n (A.T.G)_{i,j}}{\sum_{i=1}^m \sum_{j=1}^n (T)_{i,j}} \dots (1)$$


$$W_p = \frac{\sum_{i=1}^m \sum_{j=1}^n (1-T)_{i,j}}{\sum_{i=1}^m \sum_{j=1}^n (1-T)_{i,j}} \dots (2)$$



(a)

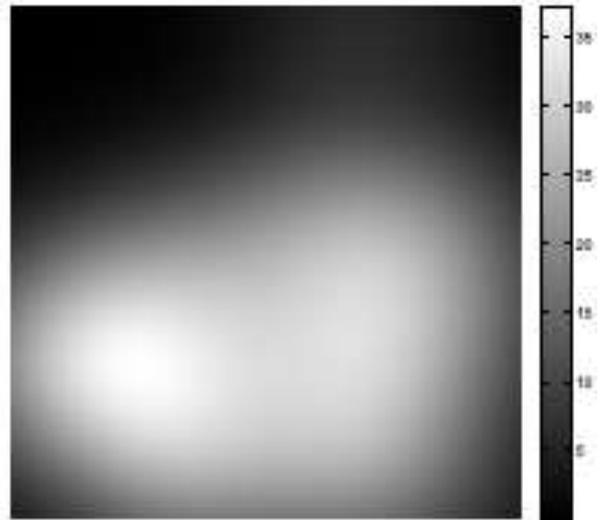

(b)

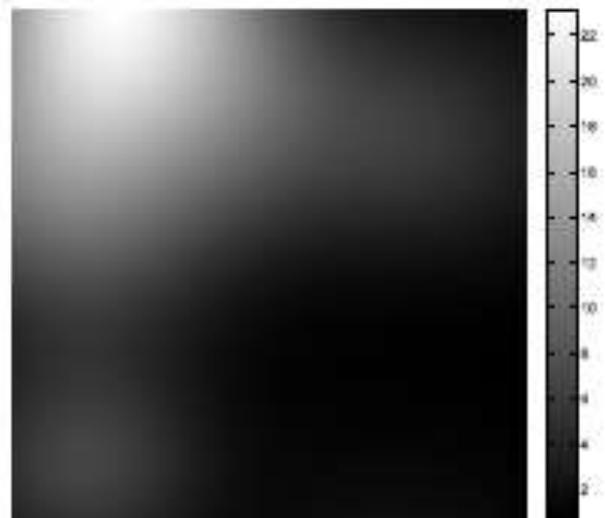

(c)

Fig 4- Weighting maps for textual and pictorial regions of one SCI example. (a) Reference image: cim1. (b) Weighting map for textual regions. (c) Weighting map for pictorial regions.

Based on the calculated quality maps of textual layer  $Q_t\_map$  and pictorial layer  $Q_p\_map$ , the quality scores of the textual and pictorial regions are computed as the mean values of the corresponding regions:

$$Q_t = \frac{Q_t\_map \cdot T}{\sum_{i=1}^m \sum_{j=1}^n (T)} \quad \dots(3)$$

$$Q_p = \frac{Q_p\_map \cdot (1-T)}{\sum_{i=1}^m \sum_{j=1}^n (1-T)} \quad \dots(4)$$

Following the same notation above,  $m$  and  $n$  denote the dimension of the reference SCI. The final quality score  $Q$  of the distorted image  $Y$  is computed as follows:

$$Q = W_t * Q_t + W_p * Q_p \quad \dots(5)$$

#### IV. CONCLUSION

A study on perceptual quality measure of distorted SCIs, from both subjective and objective perspectives is studied. A large-scale image database, SIQAD, is built to explore the subjective quality evaluation of SCIs. Values of images in the database are obtained via the subjective test, and their reliability is verified. The built SIQAD is expected to be helpful in further research in SCIs. Based upon the three subjective scores for textual, pictorial and entire regions, we find that textual regions contribute more to the quality of the entire image in most distortion cases. The proposed weighting strategy works well and combining the weighting strategy, a new objective quality metric is constructed to separately assess the visual quality of textual and pictorial regions. The proposed integration scheme, named SPQA, outperforms existing 11 NIQA objective metrics on visual quality evaluation of distorted SCIs.

#### REFERENCES

- [1] Quality Assessment of Screen Content Images Huan Yang, Yuming Fang, and Weisi Lin, Senior Member, IEEE 2015.
- [2] H. Shen, Y. Lu, F. Wu, and S. Li, "A high-performanance remote computing platform," in Proc. IEEE PerCom, Mar. 2009, pp. 1–6.
- [3] T.-H. Chang and Y. Li, "Deep shot: A framework for migrating tasks across devices using mobile phone cameras," in *Proc. ACM CHI*, 2011, pp. 2163–2172
- [4] T. Lin and P. Hao, "Compound image compression for real-time computer screen image transmission," *IEEE Trans. Image Process.*, vol. 14, no. 8, pp. 993–1005, Aug. 2005.
- [5] W. Lin and C.-C. J. Kuo, "Perceptual visual quality metrics: A survey," *J. Vis. Commun. Image Represent.*, vol. 22, no. 4, pp. 297–312, May 2011.
- [6] M. Chandler, "Seven challenges in image quality assessment: Past, present, and future research," *ISRN Signal Process.*, vol. 2013, pp. 1–53, 2013.
- [7] A K Moorthy and A. C. Bovik, "Visual quality assessment algorithms: What does the future hold?" *Multimedia Tools Appl.*, vol. 51, no. 2, pp. 675–696, Jan. 2011.
- [8] H. R. Sheikh, M. F. Sabir, and A. C. Bovik, "A statistical evaluation of recent full reference image quality assessment algorithms," *IEEE Trans. Image Process.*, vol. 15, no. 11, pp. 3440–3451, Nov. 2006..
- [9] T. GraceWinsolin. "Removal of Shadow in Video Sequences Using Effectual Modelling of Descriptors Statistically." *International Journal of Electrical, Electronics and Computer Systems 2.2* (2011): 198-202.
- [10] S. Winkler, "Analysis of public image and video databases for quality assessment," *IEEE J. Sel. Topics Signal Process.*, vol. 6, no. 6, pp. 616–625, Oct. 2012. Methodology for the Subjective Assessment of the Quality of Television Pictures, document Rec. ITU-R BT.500-11, 2012
- [11] Z. Wang, A. C. Bovik, H. R. Sheikh, and E. P. Simoncelli, "Image quality assessment: From error visibility to structural similarity," *IEEE Trans. Image Process.*, vol. 13, no. 4, pp. 600–612, Apr. 2004.
- [12] W. Xue, L. Zhang, X. Mou, and A. C. Bovik, "Gradient magnitude similarity deviation: A highly efficient perceptual image quality index," *IEEE Trans. Image Process.*, vol. 23, no. 2, pp. 684–695, Feb. 2014.
- [13] J. Wu, W. Lin, G. Shi, and A. Liu, "Reduced-reference image quality assessment with visual information fidelity," *IEEE Trans. Multimedia*, vol. 15, no. 7, pp. 1700–1705, Nov. 2013
- [14] Sathiyapriya. "An Identification of Abnormalities in Dental with Support Vector Machine Using Image Processing." *Emerging Research in Computing, Information, Communication and Applications*. Springer India, 2015. 29-40.
- [15] L. Li and Z.-S. Wang, "Compression quality prediction model for JPEG2000," *IEEE Trans. Image Process.*, vol. 19, no. 2, pp. 384–398, Feb. 2010..
- [16] Y.-H. Lee, J.-F. Yang, and J.-F. Huang, "Perceptual activity measures computed from blocks in the transform domain," *Signal Process.*, vol. 82, no. 4, pp. 693–707, Apr. 2002..
- [17] H. Yang, W. Lin, and C. Deng, "Image activity measure (IAM) for screen image segmentation," in *Proc. IEEE Int. Conf. Image Process.*, 2012, pp. 1569–1572.

#### Author Profile



**S CHINMAYA** received a BE degree in Computer Science and Engineering from PPG Institute of Technology in 2015. She currently pursues ME in the Department of Computer Science and Engineering at the Sri Krishna College of Engineering and Technology, Coimbatore, India. Her research interests include

Digital Image Processing.



**R. BALAJI** is working as an Assistant Professor in the department of Computer Science and Engineering, Sri Krishna College of Engineering and Technology, Coimbatore. His area of interest includes Digital Image Processing, Computer Vision and Data Mining.